



COMPACTNESS AS ITS BEST



CPBATTERY CP120B

Battery Operated Portable X-Ray Generator



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group

All the power you need and more



LIGHT-WEIGHT



BATTERY OPERATED




SMALL FOCAL SPOT



DR-READY



UP TO 120 KV



ROTATING TANK


FEATURES

	Unit	CP120B
Beam	-	Directional
Power supply	-	Battery
Output voltage range	kV	40 to 120
Tube current range	mA	0.1 to 1.0
Tube current at full output	mA	1.0
Maximum power at the anode	W	120
Constant power mode	-	Yes
Working cycle at 30°C (*)	%	/
Steel penetration (**)	mm/in	10 / 0.4
Weight (excluding hand rings)	Kg/lbs	7.0 / 15.4
Overall dimensions	mm/in	Ø 124 x 440 / 4.9 x 17.3
Leakage dose at 1 m at full output	mSv/h	< 2.0
Optical focal spot according to EN 12543	mm/in	0.8 x 0.5 / 0.03 x 0.02
Maximum useful angle	°	50 x 50
Inherent filtration	mm/in	Equiv. 3.5 / 0.1 (Al)
Waterproof level	-	IP54
Operating temperature	°C/°F	-25 to +50 / -13 to +140
Storage temperature	°C/°F	-40 to +80 / -40 to +176
Guard rings	-	Optional

(*) Open air - airstream 5m/sec.

(**) 400 mm FFD, 1 min., AA400, D=2 for CPB

DRAWINGS

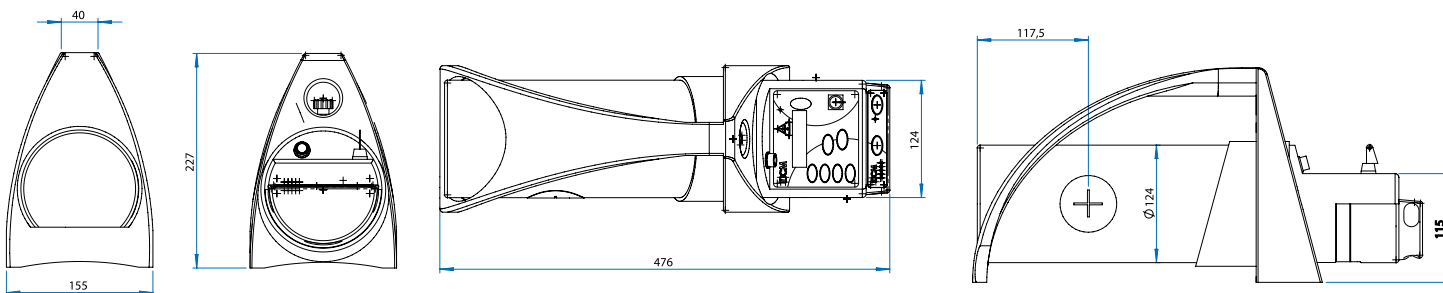

All specifications are non contractual and subject to change without prior notice.

TELEDYNE ICM

Zoning Les Plenesses / Rue Du Progrès 3 / B-4821 Andrimont (Dison) - Belgium

+32 (0)87 44 01 50 / icm.sales@teledyne.com

ACCESSORIES



RUGGEDIZED STRUCTURE



ADJUSTABLE COLLIMATOR



CARBON TRIPOD



FAST BATTERY CHARGER



TRIGGER



EXTERNAL POWER SUPPLY



TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group