


HiPe
Sens

It makes SenSe!

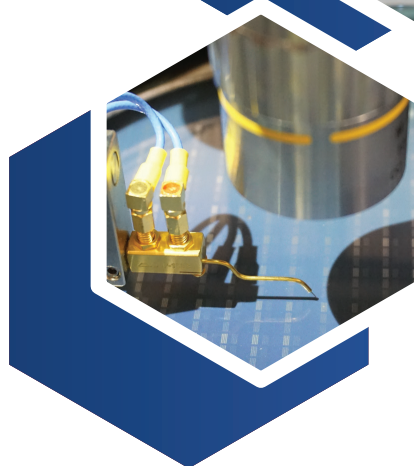

HiPe Sens

High Performance Air-Cooled SWIR camera

Low Dark current for Long exposure applications

640 x 512 Pixels Resolution 15 μ m Pitch

SWIR Imaging from 0.9 to 1.7 μ m



NiT

New Imaging Technologies

www.new-imaging-technologies.com

▶ Key Features

- ☒ TEC & fan aircooled
- ☒ Long exposure time
- ☒ High QE InGaAs from 900nm to 1700nm
- ☒ VGA resolution , 640x512 effective pixels
- ☒ Bad Pixels Replacement and Non Uniformity Correction
- ☒ USB3.0 & CameraLink interface

▶ Applications

- ☒ Medical & Life Science
- ☒ Metrology (microscopy, hyperspectral)
- ☒ Process control (industry, semiconductors, food, ...)
- ☒ Surveillance
- ☒ Photon counting

Imagine yours...

▶ Technical Specifications

Sensor	NSC1902T-SI	Sensor Noise	<40e ⁻
Material	InGaAs	Dark current Value	<1500 e-/pixels/s @-20°C
Resolution	640 x 512 pixels	Operating Mode	TEC2 + Fan aircooled
Pixel size	15 μm x 15 μm	Cooling capacity	Δ50°C
Spectral response	0.9 to 1.7 μm	Trigger	IN/OUT (LVTTTL)
Response	Linear, 3 gain levels	Trigger delay	Adjustable
Modes	IWR/ITR, CDS, ROI	Dimensions	46 x 57 x 112 mm
QE	>85% (90% typical)	Weight	<350g
Output	USB3.0 & CameraLink	Lens mount	C-Mount native
Frame rate	up to 230fps full frame	Power Supply	12V
Partial Reading Mode	down to 16x16	GUI	WiDyVISION, WiDyCAM
Integration Time	10μs to 112 sec	SDK	USB Windows & Linux MicroManager adapter

Products and specifications are subject to change without notice.

MADE IN FRANCE

